

FOR FIXED OPTICS EMERGENCY LIGHTING FIXTURE – N2 SERIES

SAVE THESE INSTRUCTIONS

IMPORTANT SAFEGUARDS:


When using electrical equipment, always adhere to basic safety precautions including the following:

IMPORTANT

The battery in this unit may not be fully charged. After AC power is connected to unit, let battery charge for at least 24 hours, then normal operation of this unit should take effect. To check, press the TEST button. The emergency lamps should illuminate.

READ AND FOLLOW ALL SAFETY INSTRUCTIONS

1. Do not use outdoors.
2. Equipment should be mounted securely in locations and at heights where it will not be readily subjected to tampering by unauthorized personnel.
3. Do not mount near gas or electric heaters.
4. Cap unused wires with enclosed wire nuts or other approved method.
5. Do not use this equipment for anything other than its intended use.
6. The use of accessory equipment not recommended by the manufacturer will void product listing and warranty and may cause an unsafe condition.
7. Disconnect AC power before servicing and installation.
8. Consult local building code for approved wiring and installation.
9. Use caution when servicing batteries.
10. Any service on this equipment should be performed by qualified personnel only.
11. Make sure wire terminations are secure and leads are properly tucked in appropriate wire channels.

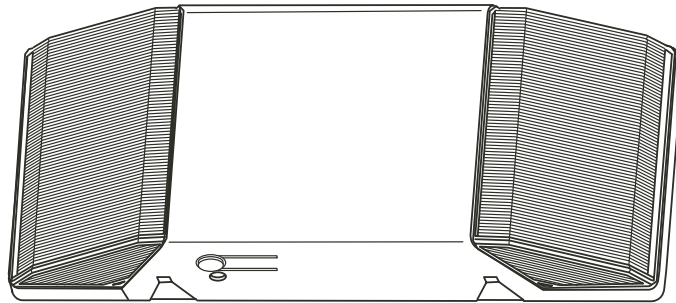

INSTALLATION INSTRUCTIONS

1. Remove unit back plate by releasing two tabs at the bottom with a narrow screwdriver blade, and pull away (FIG. 2).
2. **FOR WALL OR CEILING MOUNTING,** place screws through appropriate keyhole slots and tighten. Be sure to orient the back plate so the test switch faces down, or desired direction.
3. Attach the unswitched AC circuit wires to unit AC input wires with wire nuts. **WIRE NUT UNUSED LEADS.** For 120VAC input, follow FIG. 3. For 277VAC input, follow FIG. 4.

4. Connect red battery lead to battery positive terminal. Verify that battery negative terminal is connected to battery blue wire.
5. Align AC connector over circuit board and press onto back plate until the retaining tabs snap through the housing. Reinstall both lenses by gently squeezing top and bottom mounting tabs.

FIG. 1

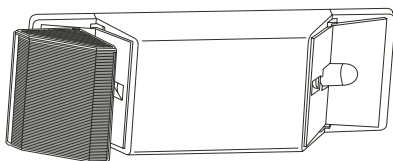


FIG. 2

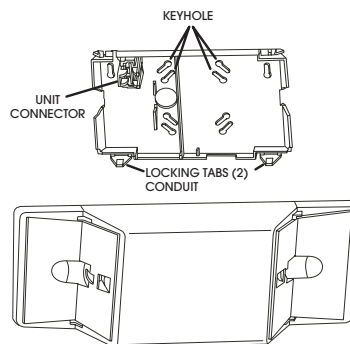


FIG. 3


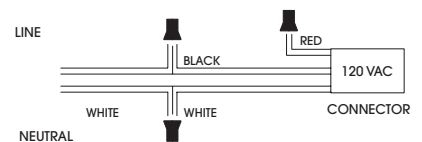


FIG. 4

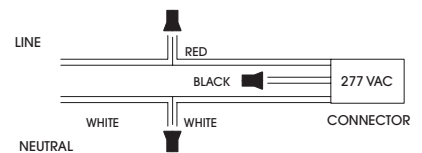

FOR FIXED OPTICS EMERGENCY LIGHTING FIXTURE – N2 SERIES

IMPORTANT SAFEGUARDS:

When using electrical equipment, always adhere to basic safety precautions including the following:

TESTING

To test, depress TEST switch. The emergency lamps will illuminate. When switch is released, lamps will go off. Allow unit to charge for 24 hours before full load testing.

IMPORTANT NOTICE

This equipment is furnished with a low voltage disconnect circuit to prevent damage by over discharging the battery. However, if AC supply to the unit is to be disconnected for prolonged periods of time, the battery must be disconnected. If unit fails to perform as described, disconnect AC and battery immediately, and contact either the factory or trained service personnel for assistance.

RELAMPING

To relamp, pull lenses off housing (FIG. 1). Relamp only with type T-5, 6V-5.4W wedge-base lamps.

WARRANTY

Juno Lighting Group warrants that its products are free from defects in material and workmanship. Juno Lighting Group's obligation is expressly limited to repair or replacement, without charge, at Juno Lighting Group's factory after prior written return authorization has been granted. This warranty shall not apply to products which have been altered or repaired outside of Juno Lighting Group's factory. This warranty is in lieu of all other warranties, expressed or implied, and without limiting the generality of the foregoing phrase, excludes any implied warranty of merchantability. Also, there are no warranties which extend beyond the description of the product on the company's literature setting forth terms of sale.

Product Services Phone (888) 387-2212

1300 S. Wolf Rd • P.O. Box 5065 • Des Plaines, IL 60017-5065 • Phone: 800-323-5068 • www.junolightinggroup.com JUNO LIGHTING GROUP

