

NAVILITE EXIT & EMERGENCY

WET LOCATION LED EXIT SIGN

AC Only

NXW Series

Project: _____

Fixture Type: _____

Location: _____

Contact/Phone: _____

PRODUCT DESCRIPTION

Navilite NXW Series Wet Location LED Exit Signs offer long lamp life, energy efficiency and uniform illumination. The water-tight, corrosion-resistant thermoplastic housing is sealed and gasketed to protect the internal electronics from water, dust and corrosive liquids. The NXW Series is designed with punch-out chevron directional indicators for optimum installation flexibility and simplified specification. Its vibration resistant LED illumination and polycarbonate lens makes this product ideal for demanding industrial environments, especially those subject to frequent water spray.

PRODUCT SPECIFICATIONS

Construction Corrosion-resistant and impact-resistant thermoplastic housing • Clear polycarbonate lens with captive non-metallic screws • Sealed and gasketed housing with integral breather vent • Multiple factory identified conduit entry locations • 6" letters with 3/4" stroke width • Chevron directional indicators can be easily removed as necessary • Single face, surface mount versions only • Includes mounting screws and hardware • Red or green letters • Industrial gray finish.

Electrical Dual voltage 120/277VAC • Rated for use in wet locations.

Lamps Long life, energy saving LED lamps • LEDs are connected in a series/parallel configuration such that the unlikely failure of one LED will affect no more than one other LED • Red LED/letters • Red signs and green signs consume less than 3 watts.

Code Compliance UL924 • Wet Location Listed • Suitable for use in 0°-40°C (32°-104°F) temperature range • NFPA 101 Life Safety Code compliant • NEC and OSHA compliant • Meets the State of Minnesota energy efficiency requirements.

Warranty 5-year warranty.


Product specifications subject to change without notice.

INSTALLATION

Mounting Surface (wall) mount only • Includes mounting screws and hardware.



DIMENSIONS

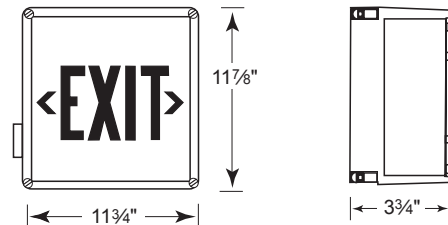

ENGINEERING DATA

	Input Voltage	Max. Amps	Max. Watts
Red LED	120	0.02	2.5
Red LED	277	0.01	2.7
Green LED	120	0.02	2.7
Green LED	277	0.01	2.9

ORDERING INFORMATION (Ordering Example: NXWRGY)

Series	Letter Color	Finish
NXW = Wet Location LED Exit Sign - AC Only	R = Red Letters G = Green Letters	GY = Gray

THIS SIDE INTENTIONALLY LEFT BLANK



1300 S. Wolf Road • Des Plaines, IL 60018 • Phone (847) 827-9880 • Fax (847) 827-2925
220 Chrysler Drive • Brampton, Ontario • Canada L6S 6B6 • Phone (905) 792-7335 • Fax (905) 792-0064
Visit us at www.junolightinggroup.com

Printed in U.S.A. ©2009 Juno Lighting, LLC.