

NAVILITE EXIT & EMERGENCY

THERMOPLASTIC EMERGENCY LIGHT

Adjustable Designer MR16 Heads

N3 Series

Project: _____

Fixture Type: _____

Location: _____

Contact/Phone: _____

PRODUCT DESCRIPTION

Navilite N3 Series Thermoplastic Adjustable Emergency Lights offer quick installation and premium options such as High Output and Self-Diagnostic versions in an economical package. The unique designer MR16 heads provide a fresh and low profile aesthetic.



PRODUCT SPECIFICATIONS

Construction Injection molded, engineering-grade, UV-stable thermoplastic • UL94V-0 flame rating • Impact, scratch, fade and corrosion-resistant • Snap-fit housing and mounting plate • Universal mounting plate with quick-connect feature reduces installation labor • White or black textured finish.

Electrical Dual voltage 120/277VAC • Solid state charging and switching • Brownout protection • Battery low voltage disconnect • Overload and short circuit protection • AC power indicator and test switch.

Lamps Supplied with 6V, 5W MR16 halogen bi-pin lamps.


Battery Maintenance-free 6V sealed lead calcium battery • Standard battery will operate fixture for a minimum of 90 minutes in the event of a power outage • High Output version will operate a total of 15 Watts for a minimum of 90 minutes.

Code Compliance UL924 • NFPA 101 Life Safety Code compliant • NEC and OSHA compliant.

Warranty 5-year warranty (see reverse for battery warranty).

Product specifications subject to change without notice.

DIMENSIONS

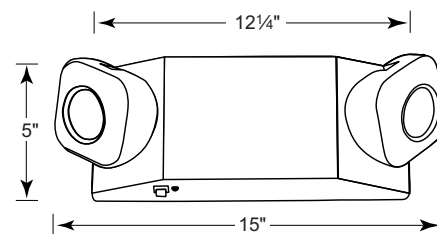

Depth: 5" max.

ENGINEERING DATA

Input Voltage	Max. Amps	Max. Watts
120	0.04	3.4
277	0.02	4.2

ACCESSORIES

Catalog Number	Description
NV53	Polycarbonate Vandal Shield - Small Bubble
NWG1	Wire Guard - Small

Accessories are ordered separately. To order, specify catalog number. Refer to Options & Accessories specification sheet for additional information.

ORDERING INFORMATION — Standard Units

Catalog Number	Finish	Output Voltage	Lamp Wattage	Rated Output Watts		
				1 1/2 hrs.	2 hrs.	4 hrs.
N3WH	White	6V	2 x 5W	11	—	—
N3BL	Black	6V	2 x 5W	11	—	—
N3WHSD (Self-Diagnostic)	White	6V	2 x 5W	11	—	—
N3BLSD (Self-Diagnostic)	Black	6V	2 x 5W	11	—	—

ORDERING INFORMATION — High Output Units

Catalog Number	Finish	Output Voltage	Lamp Wattage	Rated Output Watts		
				1 1/2 hrs.	2 hrs.	4 hrs.
N3WHHO	White	6V	2 x 5W	15	—	—
N3BLHO	Black	6V	2 x 5W	15	—	—

NAVILITE EXIT & EMERGENCY



THERMOPLASTIC EMERGENCY LIGHT

Adjustable Designer MR16 Heads

N3 Series

PHOTOMETRICS

6V, 5W Halogen MR16 Lamp, MR16 Head (Replacement Lamp NL6V5MR)

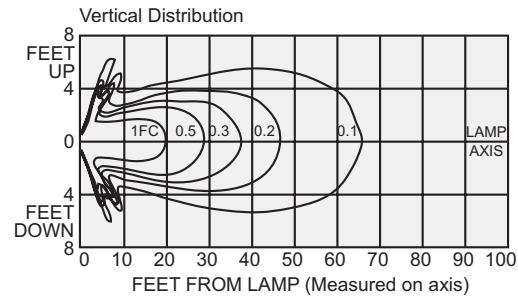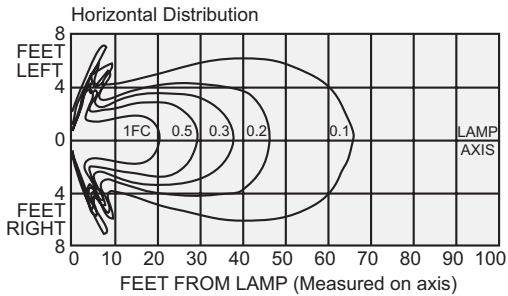

BATTERY DATA

- Lead Calcium battery warranted for one full year with additional 4 years pro-rated warranty
- Recharges in 24 hours or less

Type	Battery Voltage	Shelf Life ¹	Expected Life ¹	Temperature Range ²
Lead Calcium (std.)	6V, 4.5Ah	15 months	5-8 years	40°F-95°F
Lead Calcium (HO)	6V, 7Ah	15 months	5-8 years	40°F-95°F

¹ At 77°F

² To obtain rated life and capacity.