

DK SERIES LED FLOOD

**AccuLite™**

Energy efficient, impact resistant,  
low profile LED Flood Light



# Environmentally-friendly Low Profile LED Flood

Low profile, energy efficiency, and lighting uniformity are just some of the features blended together in this rugged luminaire. The AccuLite DK Series Flood not only saves energy with its low wattage LED light engine, but also with its optional motion sensor (DK130 only) that turns the fixture off when the area is not in use. The DK Series is perfect for work light applications such as loading docks, long refrigeration/storage areas, and other traffic related environments.




## Features

- All aluminum construction, polyester powder coated for superb corrosion protection
- Completely sealed electronics
- Frosted lens for visual comfort
- 14 individual LED lenses deliver highly uniform lighting in a tight beam pattern for long throw applications
- Available with motion sensor for automatic on-demand applications
- Available in safety yellow finish with an accessory arm for work light applications

## Certifications

- UL1598, CSA C22.2 250
- DK130 suitable for damp locations, DKW130 suitable for wet locations
- Union made

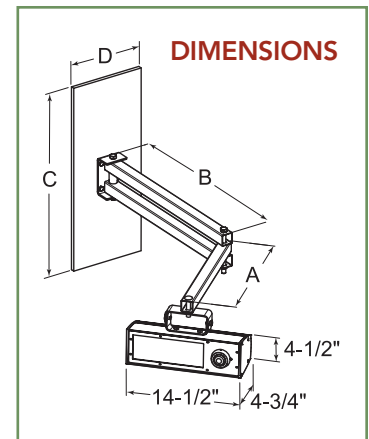

Shown with Articulated Arm.  
Arm must be ordered separately.

## ACCESSORY ARM DIMENSIONS


	A	B	C	D
42" Arm	16.75"	25.5"	5"	3"
60" Arm	24.75"	35.25"	17"	5"

# PHOTOMETRICS

Luminaire Schedule				
Qty	Label	Description	Lumens	LLF
1	A	DK130L-U-41K	1,421	0.850

Calculation Summary					
Label	Avg	Max	Min	Avg/Min	Max/Min
Vert @ 10FT	10.14	44.8	0.2	50.70	224.00
Vert @ 20FT	6.67	11.4	2.1	3.18	5.43
Vert @ 30FT	4.09	5.2	2.2	1.86	2.36
Vert @ 40FT	2.55	2.9	1.9	1.34	1.53
Vert @ 50FT	1.68	1.9	1.2	1.40	1.58

NOTE: Calculated using a 0.85 light loss factor to account for dirt depreciation and reduced illumination levels due to LED degradation with time.

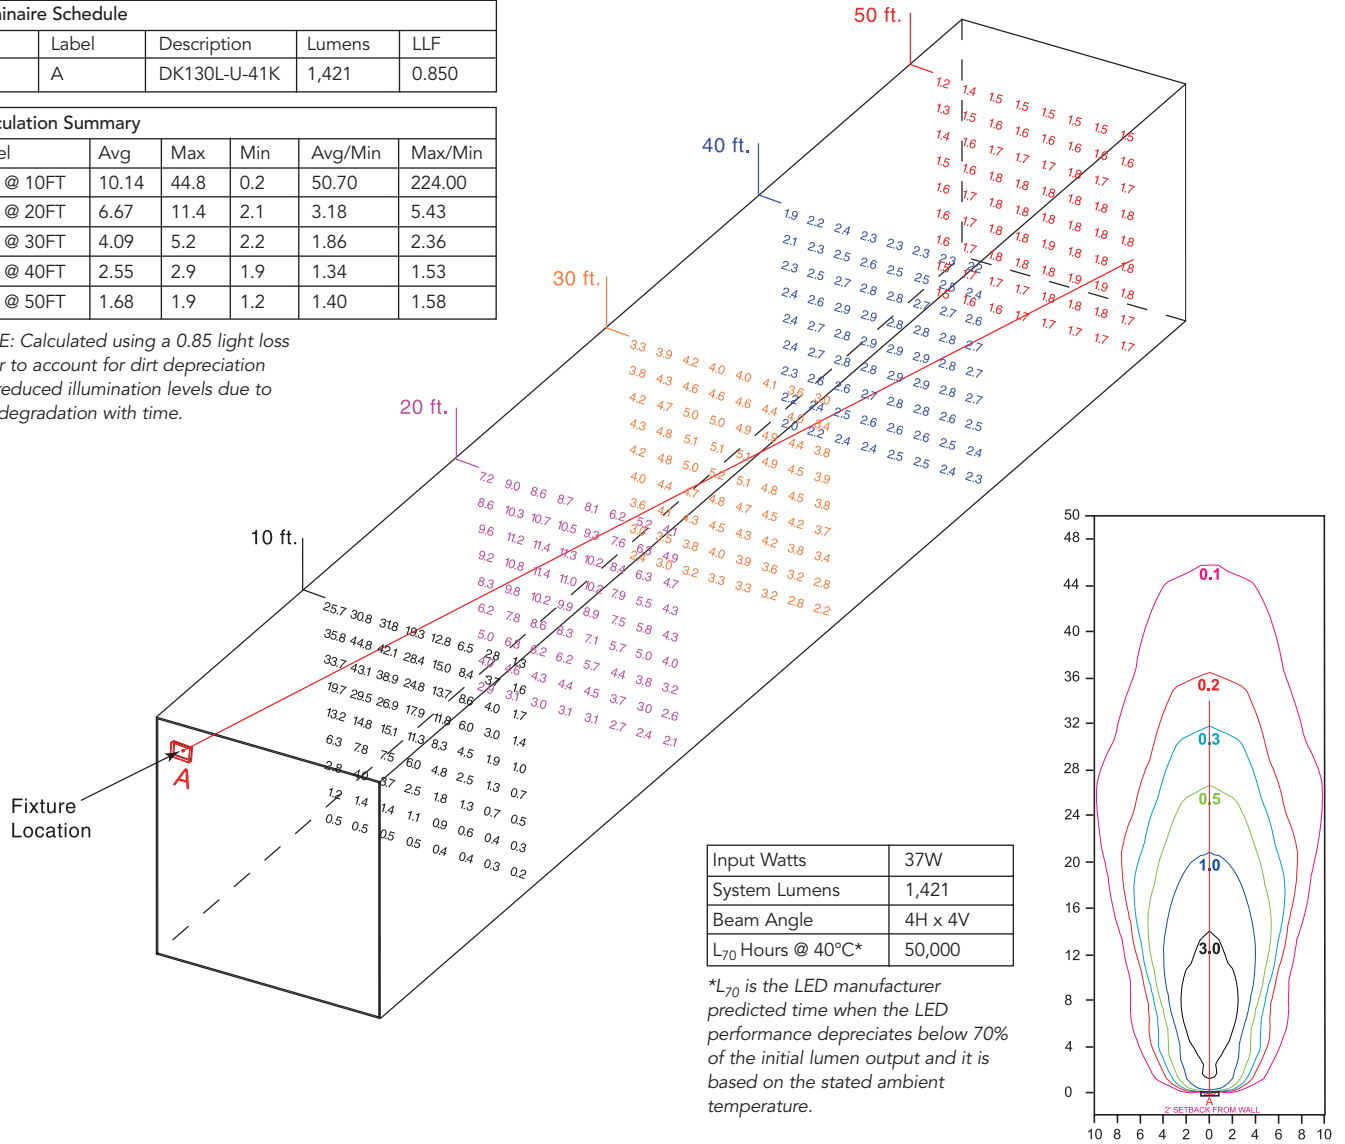

## ORDERING INSTRUCTIONS - FIXTURE ONLY

Series	Source	Voltage	CCT	Mounting	Finish	Options
DK130	- L	- U	- 41K	- T	- WH	- M
DK130 Damp Location	L LED	U Universal 120-277VAC	41K 4100K	T Trunion	BZ Bronze	M Motion Sensor (not available with DKW130)**
DKW130 Wet Location				A Provision for arm (not available with DKW130)*	BL Black	3SOW Included with all fixtures, 3' cord, 3 conductor 16 AWG (for other lengths replace "3" with length in feet)
					WH White	
					SY Safety Yellow	

\*Arm mounting provision is damp location only and includes a special cord and plug to connect to the arm. Arm must be ordered separately. Fixture finish is available as safety yellow only to match arm finish.

\*\*Motion sensor is only available with damp location.

## ACCESSORIES (MUST BE ORDERED SEPARATELY)

DKARM42SY	42" Articulated Arm, safety yellow only
DKARM60SY	60" Articulated Arm, safety yellow only



**Juno**<sup>®</sup>  
Recessed and Trac Lighting

**indy**<sup>™</sup>  
Architectural Recessed Lighting

**Alfa**<sup>™</sup>  
Decorative Lighting Systems

**AccuLite**<sup>™</sup>  
Commercial and Industrial Lighting

**AcuLux**<sup>™</sup>  
Precision Recessed Lighting

**NaviLite**<sup>®</sup>  
Exit and Emergency Lighting

**DanaLite**<sup>®</sup>  
Architectural Linear Lighting

1300 S. Wolf Road • Des Plaines, IL 60018  
PHONE 847.827.9880 • FAX 847.827.2457 • [www.junolightinggroup.com](http://www.junolightinggroup.com)

**Regional Offices & Warehouses:**

California, Georgia, Illinois, Indiana, Pennsylvania, New Jersey, Texas, Ontario CN



**Mixed Sources**  
Product group from well-managed  
forests, controlled sources and  
recycled wood or fiber  
Cert. no. SW-COC-002566  
[www.fsc.org](http://www.fsc.org)  
© 1996 Forest Stewardship Council

LIT-ACCU-DK



Products shown in this brochure are covered by U.S. and  
international patents and patents pending.  
Specifications subject to change without notice.  
© 2010 JUNO LIGHTING, LLC