



Applications

Steel LED Exit Signs offer a sleek appearance in a rugged design. Ideal for applications that require the durability of metal construction in an economical package, along with the operating savings provided by LED lamps.

Code Compliance

- UL 924
- NFPA 101 Life Safety Code Compliant
- NEC and OSHA Compliant

Ordering Information Example: NXS3RWH


Series	Number of Faces	Letter Color	Finish
NXS	3	R	WH
NXS Series	3-Universal Single/ Double Face	R-Red G-Green	WH-White BL-Black

Accessories

Catalog Number	Description
NVS1	Polycarbonate Vandal Shield - Small
NWG1	Wire Guard - Small

Accessories are ordered separately. To order, specify catalog number. Refer to Accessories section pages 1104-1106 for additional information.

Dimensions

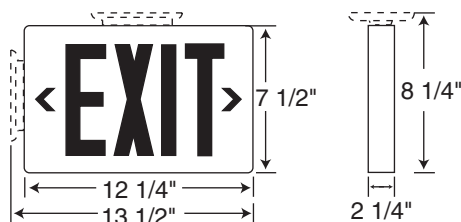

Features

- Long life, energy saving LED lamps
- Rugged, heavy duty, die-formed steel construction
- Corrosion resistant polyester powder coat paint
- Field selectable chevron directional indicator knockouts
- Universal mounting pattern knockouts in backplate for J-box mounting
- Screw-on canopy (included) for simple top or end mounting
- Universal single face and double face (extra faceplate included)
- Dual voltage 120/277 VAC operation

Mounting

May be top, end or back mounted • All signs include canopy and mounting hardware for easy top or end mount installation • Backplate includes universal mounting pattern knockouts for simple back mounting

Electrical Data

Lamps Long life, energy saving LED lamps • LEDs are connected in a series/parallel configuration such that the unlikely failure of one LED will affect no more than one other LED • Red or green LED/letters

	Input Voltage	Max. Amps	Max. Watts
Red LED	120	0.04	4.9
Red LED	277	0.02	4.9
Green LED	120	0.02	1.8
Green LED	277	0.01	1.8

