



Applications

Wet location approved exit signs feature an enclosure resistant to corrosive atmospheres, non-hazardous dust environments, frequent water spray or splashing water.


Code Compliance

- UL 924
- Wet Location Listed
- Suitable for use in 0°C-40°C (32°F-104°F) temperature range
- NFPA 101 Life Safety Code Compliant
- NEC and OSHA Compliant

Ordering Information

Catalog Number	Letter Color	Finish
NXWRGY	Red	Gray
NXWGGY	Green	Gray

Dimensions

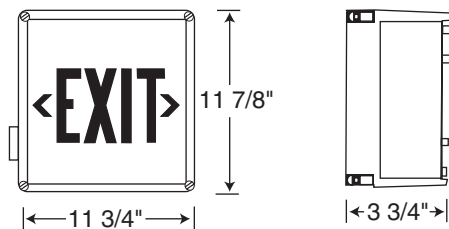

Features

- Long life, energy saving LED lamps
- Impact resistant thermoplastic housing
- Clear polycarbonate faceplate with white vinyl EXIT stencil
- Sealed and gasketed housing
- Integral breather vent
- Field selectable chevron directional indicators
- Single face, surface mount version only
- Includes mounting screws and hardware
- Dual voltage 120/277 VAC operation
- Listed for wet location applications (0°C-40°C)

Mounting

Surface (wall) mount only • Includes mounting screws and hardware

Electrical Data

Lamps Long life, energy saving LED lamps • LEDs are connected in a series/parallel configuration such that the unlikely failure of one LED will affect no more than one other LED • Red or green LED/letters

	Input Voltage	Max. Amps	Max. Watts
Red LED	120	0.02	2.5
Red LED	277	0.01	2.7
Green LED	120	0.02	2.7
Green LED	277	0.01	2.9