

NXWB Series Wet Location LED Exit

Battery Back-Up

ENERGY EFFICIENT

Navilite™



Features

- Long life, energy saving LED lamps
- Corrosion and impact resistant thermoplastic housing
- Clear polycarbonate faceplate with white vinyl EXIT stencil
- Sealed and gasketed housing
- Sealed test switch and power indicator light
- Integral breather vent
- Field selectable chevron directional indicators
- Single face, surface mount version only
- Includes mounting screws and hardware
- Dual voltage 120/277 VAC operation
- Listed for wet location applications (0°C-40°C)
- Maintenance-free 4.8V sealed nickel cadmium battery

Mounting

Surface (wall) mount only • Includes mounting screws and hardware

Ordering Information

Catalog Number	Letter Color	Finish
NXWBRGY	Red	Gray
NXWBGGY	Green	Gray

Electrical Data

Lamps Long life, energy saving LED lamps • LEDs are connected in a series/parallel configuration such that the unlikely failure of one LED will affect no more than one other LED • Red or green LED/letters

	Input Voltage	Max. Amps	Max. Watts	Standby Watts
Red LED	120	0.03	3.6	2.9
Red LED	277	0.01	3.2	2.9
Green LED	120	0.03	3.4	3.0
Green LED	277	0.01	3.4	2.9

Battery Long life, maintenance-free, high performance nickel cadmium • Designed to operate over a wider range of temperatures (32°F-100°F operating range) • Battery will operate sign for 90 minutes in the event of a power outage • Nickel cadmium battery warranted for five full years

Battery Type	Temp. Range ¹
Nickel Cadmium (Std.)	32°F-100°F
Lead Calcium (HO)	40°F-95°F

¹To obtain rated life and capacity.




Applications

Wet location approved exit signs feature an enclosure resistant to non-hazardous dust environments, frequent water spray or splashing water.

Code Compliance

- UL 924
- Wet Location Listed
- Suitable for use in 0°C-40°C (32°F-104°F) temperature range
- NFPA 101 Life Safety Code Compliant
- NEC and OSHA Compliant

Dimensions

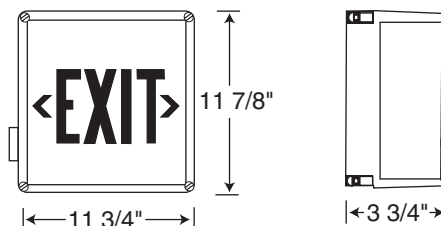

Exit Signs

