



**Applications**

Fully adjustable MR16 designer heads offer a fresh aesthetic in this elegantly designed, quick-install emergency light.

**Code Compliance**

- UL 924
- NFPA 101 Life Safety Code Compliant
- NEC and OSHA Compliant

**Features**

- Injection molded, high impact, UV-stabilized thermoplastic construction
- Compact, low profile design in white and black finishes
- Universal mounting plate with quick-connect feature reduces installation labor
- Universal mounting pattern knockouts in backplate for J-box mounting
- Fully adjustable glare-free lighting heads
- Dual voltage 120/277 VAC operation
- Maintenance-free 6V sealed lead calcium battery
- Available with HO option for remote loads
- Supplied with 6V 5W MR16 halogen lamps

**Mounting**

Suitable for wall or ceiling mounting • Mounting plate includes universal mounting pattern for simple mounting over J-box

**Ordering Information**

Catalog Number	Finish	Output Voltage	Lamp Wattage	Rated Output Watts			Remote Capacity
				1 1/2 hrs.	2 hrs.	4 hrs.	
<b>N3WH</b>	White	6V	2 x 5.4W	11	-	-	-
<b>N3BL</b>	Black	6V	2 x 5.4W	11	-	-	-
<b>N3WHSD</b> (Self-Diagnostic)	White	6V	2 x 5W	11	-	-	-
<b>N3BLSD</b> (Self-Diagnostic)	Black	6V	2 x 5W	11	-	-	-
<b>N3WHHO</b>	White	6V	2 x 5W	15	10	-	5.4W max.
<b>N3BLHO</b>	Black	6V	2 x 5W	15	10	-	5.4W max.

For remote heads selection, see pages 1088-1089

**Accessories**

Catalog Number	Description
<b>NVS3</b>	Polycarbonate Vandal Shield - Small Bubble
<b>NWG1</b>	Wire Guard - Small

Accessories are ordered separately. To order, specify catalog number. Refer to Accessories section pages 1104-1106 for additional information.

**Electrical Data**

**Lamps** Supplied with 6V, 5W halogen MR16 lamps


Input Voltage	Max. Amps	Max. Watts
120	0.04	3.8
277	0.02	4.2

**Battery** Maintenance-free 6V sealed lead calcium battery • Battery will operate fixture for a minimum of 90 minutes in the event of a power outage • High Output version will operate the two heads plus and additional 5W remote load for a minimum of 90 minutes • Lead calcium battery warranted for one full year

Battery Type	Battery Voltage	Temperature Range <sup>1</sup>
Lead Calcium (Std)	6V, 4.5Ah	40°F-95°F
Lead Calcium (HO)	6V, 7Ah	40°F-95°F

<sup>1</sup>To obtain rated life and capacity

**Dimensions**

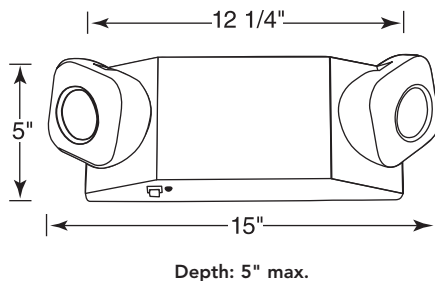

JUNO LIGHTING GROUP  
by Schneider Electric

\*N3 Series is UL Listed except for SD version.